



SCULPTING STORIES IN EVERY CLAY...

Selfie Ceramic company started as an Exporter and manufacturer of different Porcelain Tiles. Since its existence in the industry, it has gained a high reputation for world-class quality and excellent customer service.

The manufacturing unit in the company is equipped with all the modern technology that leads to zero human error and intense automation. With this, Selfie Ceramic has emerged at the most trusted brand in the tile industry.





CARVING

Collection



UNVEIL THE BEAUTY OF CARVED ELEGANCE.

Carving tiles feature detailed, hand-carved designs that showcase skilled craftsmanship. The complexity and precision of these patterns add a layer of sophistication and artistry to any surface.

The carved patterns create a three-dimensional effect, adding depth and texture to walls or floors. This tactile quality makes spaces feel more dynamic and engaging.

Each carving tile is a work of art, often handcrafted by artisans. This uniqueness lends an authentic, bespoke feel to a room, making it stand out with a personal touch.

ELEVATE YOUR HOME WITH CARVED PERFECTION.

Many carving tiles draw inspiration from historical and cultural motifs, from intricate Moroccan designs to classical-European patterns. Incorporating these tiles can imbue a space with a sense of heritage and timeless beauty.

Available in a range of styles, from traditional to contemporary, carving tiles can complement various design themes. Their versatility makes them suitable for different settings, including kitchens, bathrooms, and living areas.





ARTISTIC & TECHNICAL PERFECTION WITH ELEGANCE DESIGNS.

AESTHETIC SIZE

A complete and versatile project from the size available in the ceramics market, 600x600MM and 9mm thick to the most common size, 600x600MM, 9mm thick, passing through a full range of intermediate sizes.

AWESOME STYLE

The ceramic design interprets different inspirations, ensuring maximum aesthetic appeal in any type of environment and giving each its own style.

EXTRAORDINARY WEIGHT

The Tiles are easy to move and handle as they are only 9 mm thick, ensuring lightness despite their large size.

ADVANTAGES



Carving
Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design



13001R-4



13002R-4



13003R-4



13004R-4



13005R-4



13006R-4



Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design



13007 R-1



13008 R-1



13009 R-1



13010 R-1



13011 R-1



13012 R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design




13013

R-1




13014

R-1

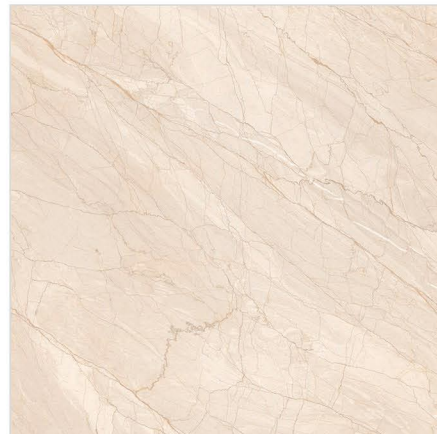

13015

R-1

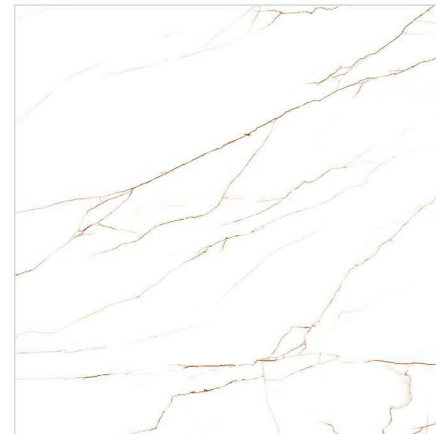


13016

R-1



13017

R-1

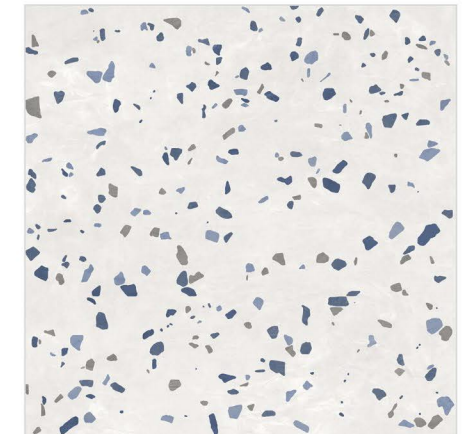

13018

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'


Carving
Surface

Random
Design



13019

R-1

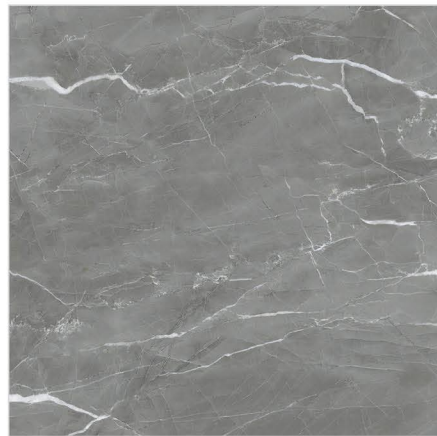


13020

R-1




13021

R-1

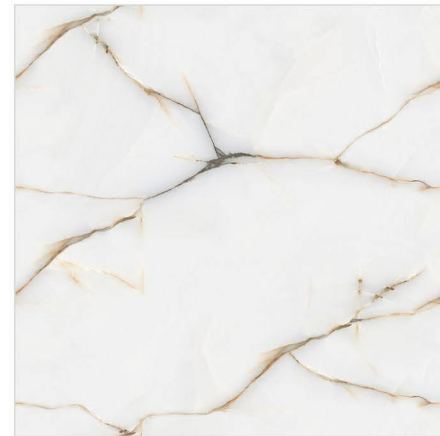


13022

R-1

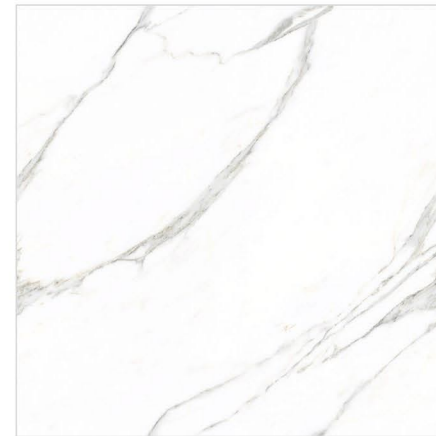

13023

R-1

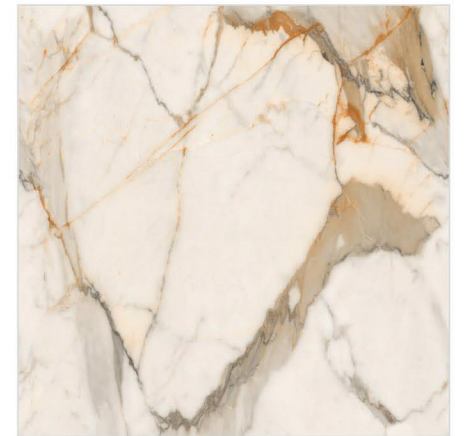

13024

R-1



Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'


Carving
Surface

Random
Design




13025

R-1

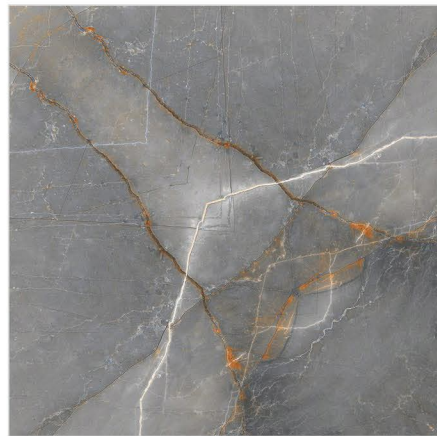

13026

R-1

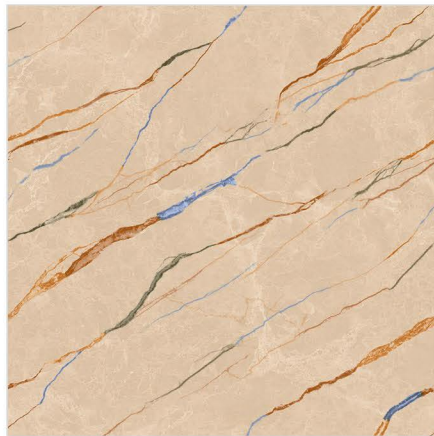


13027

R-1




13028

R-1

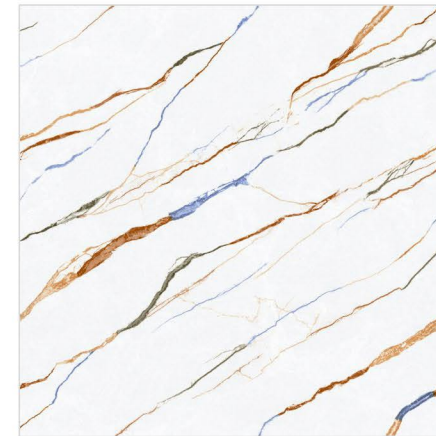

13029

R-1

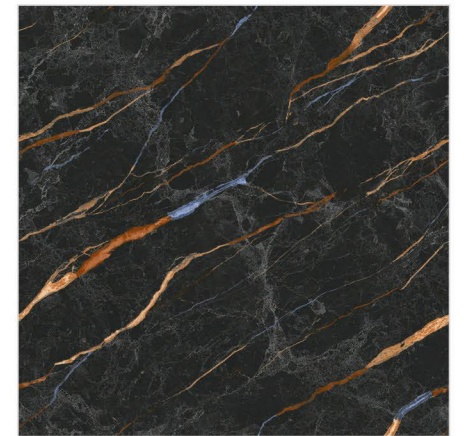

13030

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving


Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design

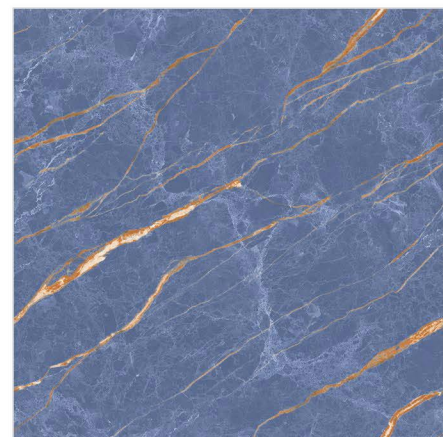


13031

R-1




13032

R-1

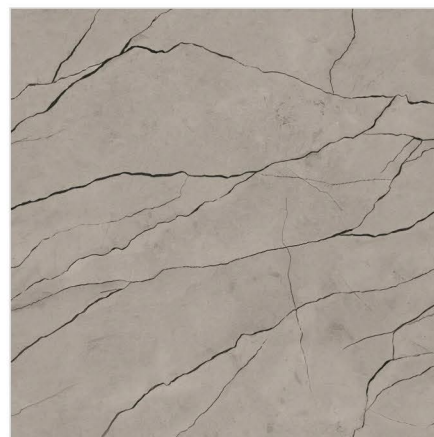


13033

R-1

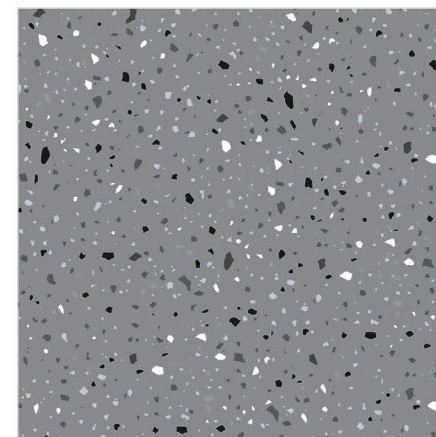


13034

R-1

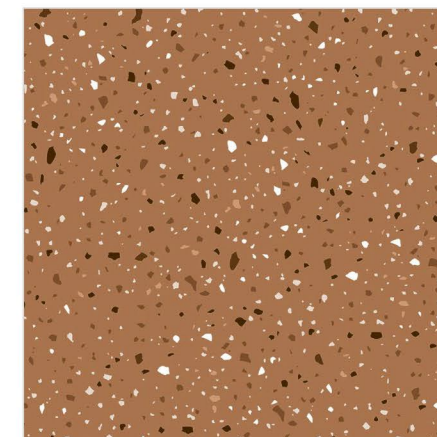

13035

R-1

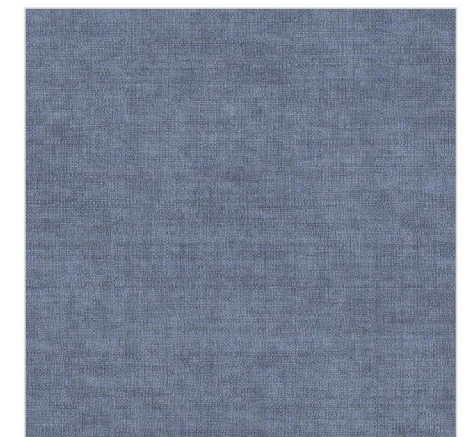

13036

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving


Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design

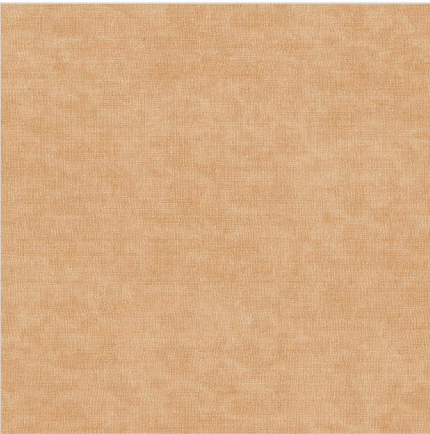

13037R-1




13038R-1




13039R-4



13040R-4

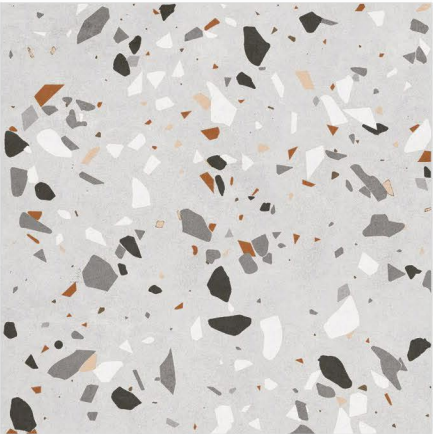

13041R-1

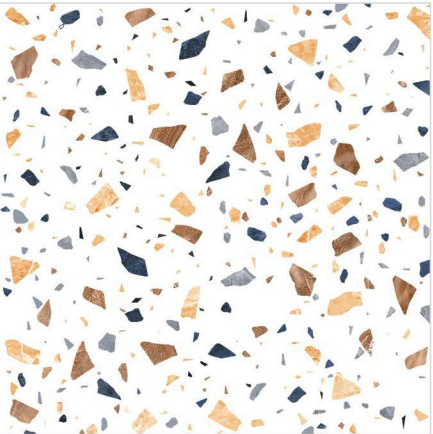

13042R-1



Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving


Collection

INFORMATION

600x600MM
60x60CM | 2'x2'


Carving
Surface

Random
Design

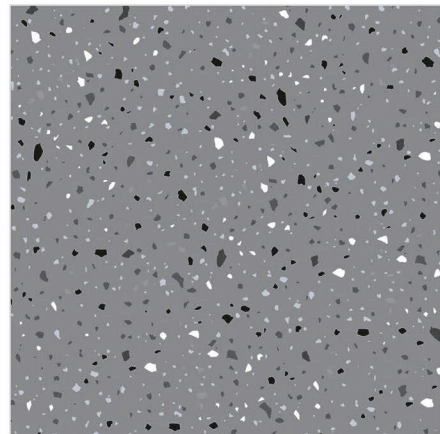

13043

R-1

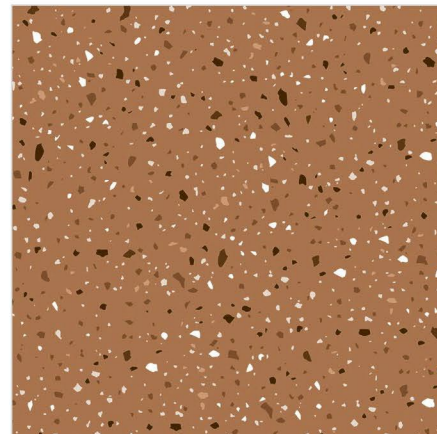


13044

R-1



13045

R-4

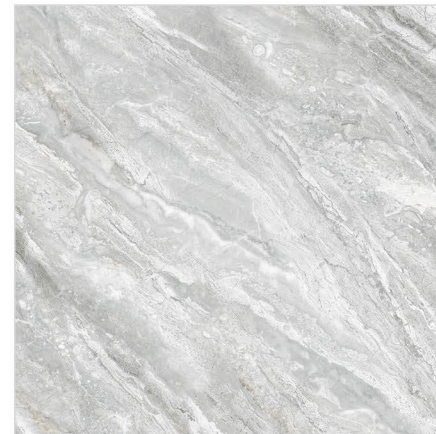


13046

R-4



13047

R-4

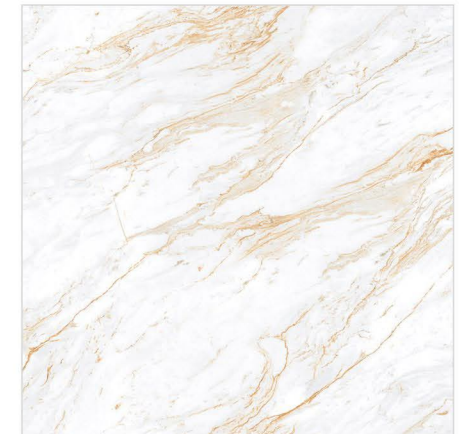

13048

R-4

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design




13049

R-4




13050

R-1

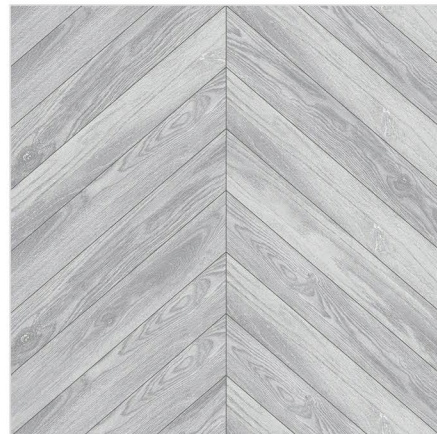


13051

R-1

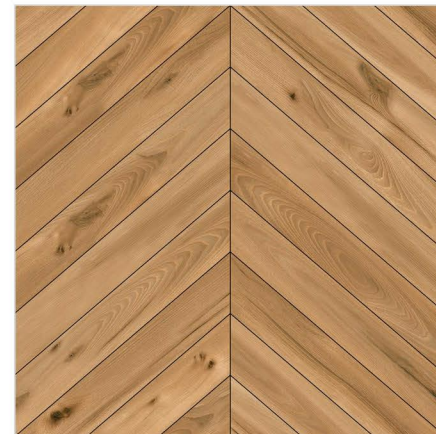

13052

R-1

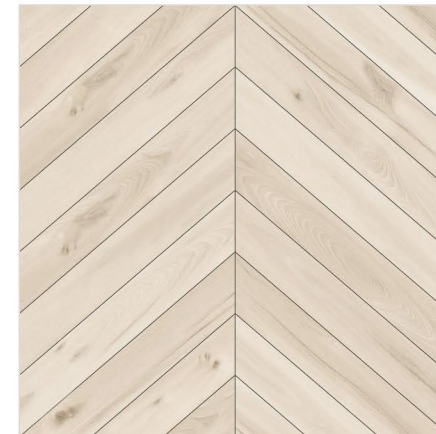

13053

R-1



13054

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving


Collection

INFORMATION

600x600MM
60x60CM | 2'x2'


Carving
Surface

Random
Design

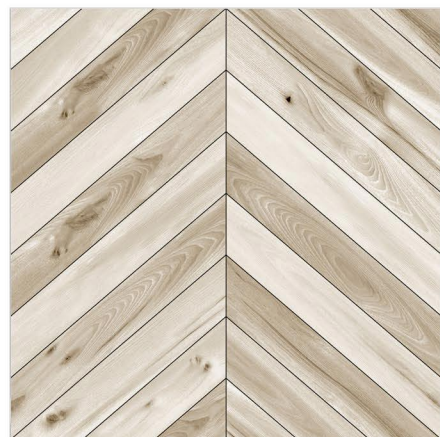


13055

R-1

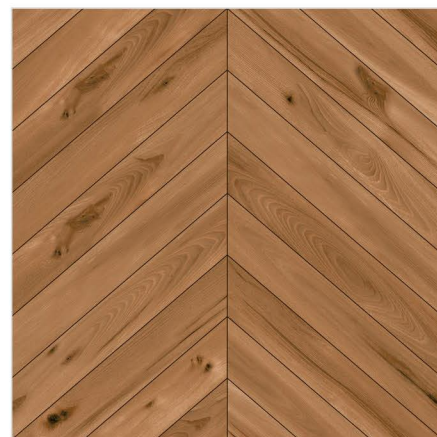

13056

R-1

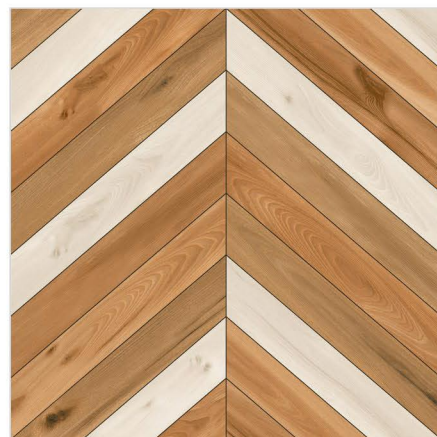

13057

R-1




13058

R-1



13059

R-1

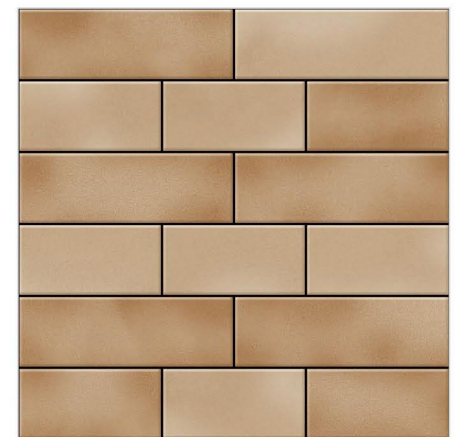

13060

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving


Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface

Random
Design

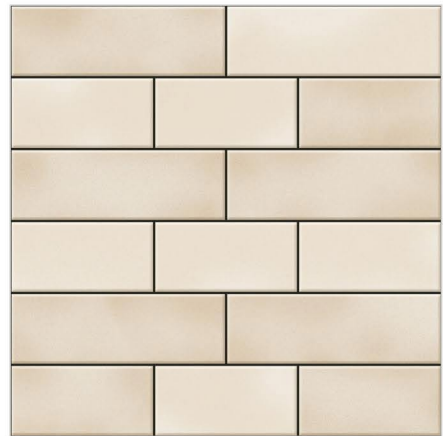

13061

R-1



13062

R-1




13063

R-1



13064

R-1

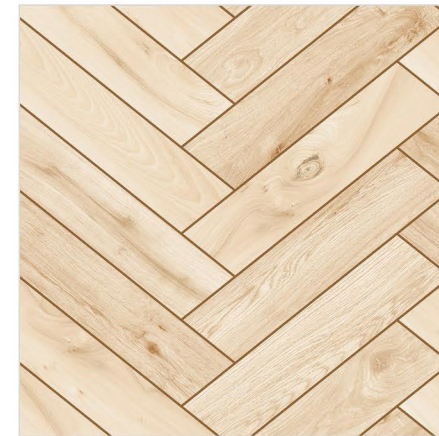

13065

R-1



13066

R-1

Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



Carving

Collection

INFORMATION

600x600MM
60x60CM | 2'x2'

Carving
Surface


Random
Design



13067 R-1



13068 R-1

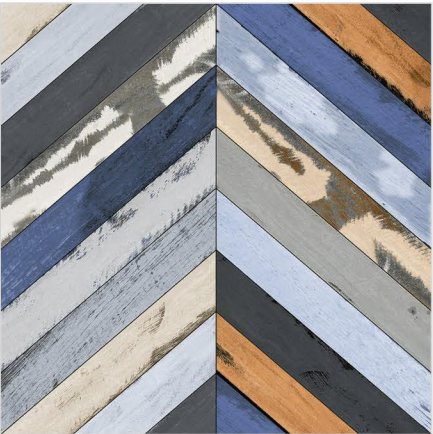

13069 R-1



Size	Surface	Pieces/Box	Box Weight	Coverage Area
600x600MM	Carving	4	25kg (Approx)	1.44sqm (Approx)



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.B1a	MEAN VALUE OF SELFIE	TEST METHOD
Regulatory Properties			
Deviation in length and width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10 %	ISO 10545-2
Surface flatness central curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness edge curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(For Plain Color)	ΔE <1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Glossiness (Matt)	as per mfg.	3° < GLOSS < 7°	Glossmeter 60°
Glossiness (satin/Posh)	as per mfg.	7° < GLOSS < 18°	Glossmeter 60°
Structural Properties			
Water absorption	0.50 % ≤ Ev ≤ 3.00 %	0.060 % ≤ Ev ≤ 3.00 %	ISO 10545-3
Bulk density	as per mfg.	> 2.28 gm/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 30.0 N/mm ²	Min. 35.0 N/mm ²	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1100.0 N	Min. 1300.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(For ≥15mm)	Min. 1100.0 N	Min. 1800.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness	as per mfg.	Polished Min 4* / Satin,Posh & Matt Min 6	BS EN 15771
Surface abrasion resistance	as per mfg.	Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4	ISO 10545-7
Deep abrasion resistance	Max. 175mm ³	Max. 132mm ³	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR)	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis unglazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance (COF-WET PENDULAM)##	as per mfg.	Glossy P0(<12),Satin, Posh ≥P1(12-24) Matt ≥P2(25-34)	BS 7976-2
Slip resistance - (Satin / Matt (DCOF) (R value)##	as per mfg.	R9 to R13**	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
GVT-PGVT	600x 600mm	8.5mm	4 pcs.	1.44 sq. mtr.	25 KG (APPROX)